


## Hydra-Mag Package

### Standard Features

- Available in sizes: 5 KW - 25 KW
- Self contained & frame mounted
- Includes all hydraulic controls with integrated single manifold
- Complete with all magnet controls
- Operates on 12 or 24 VDC
- Ready to mount and operate on delivery

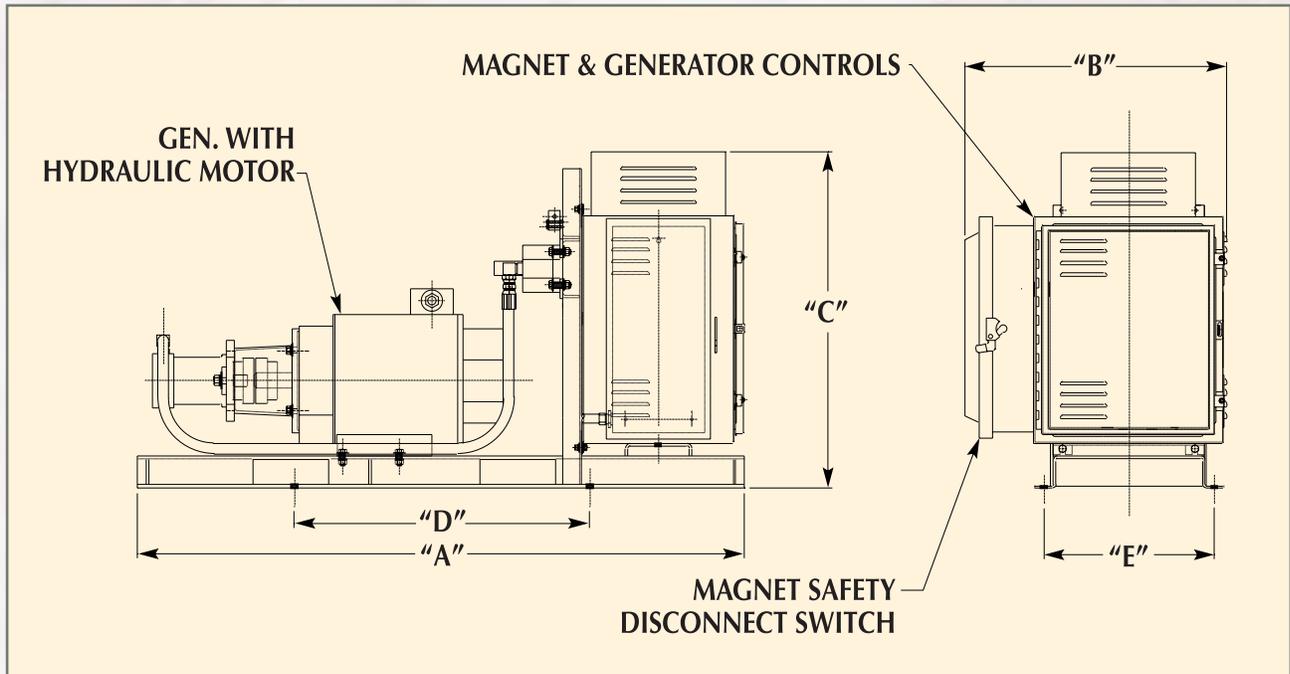

### TECHNICAL SPECIFICATIONS

Generator Size	Dimensions (in inches)					Disconnect Size	Controller Size	Required Pressure & Flow from Pump*	Shipping Weight
	A	B	C	D	E				
5 KW	43.00	28.75	28.75	20.94	18.00	30 Amp	CDS	12 GPM @ 2368 PSI	450
10 KW	50.69	24.50	34.14	31.00	14.00	60 Amp	MC-1A	31 GPM @ 1338 PSI	575
15 KW	60.25	27.62	35.63	29.25	18.00	100 Amp	MC-1A	32 GPM @ 1803 PSI	725
20 KW	62.25	27.62	36.63	31.25	18.00	100 Amp	MC-1A	32 GPM @ 2304 PSI	775
25 KW	64.25	27.62	35.63	33.25	18.00	200 Amp	MC-1.5A	32 GPM @ 2805 PSI	875

\* Ohio Magnetics recommends the use of a dedicated pump with these units to maintain the proper pressure and flow requirements throughout your excavator.